



MAX1600F / MAX1600T external view

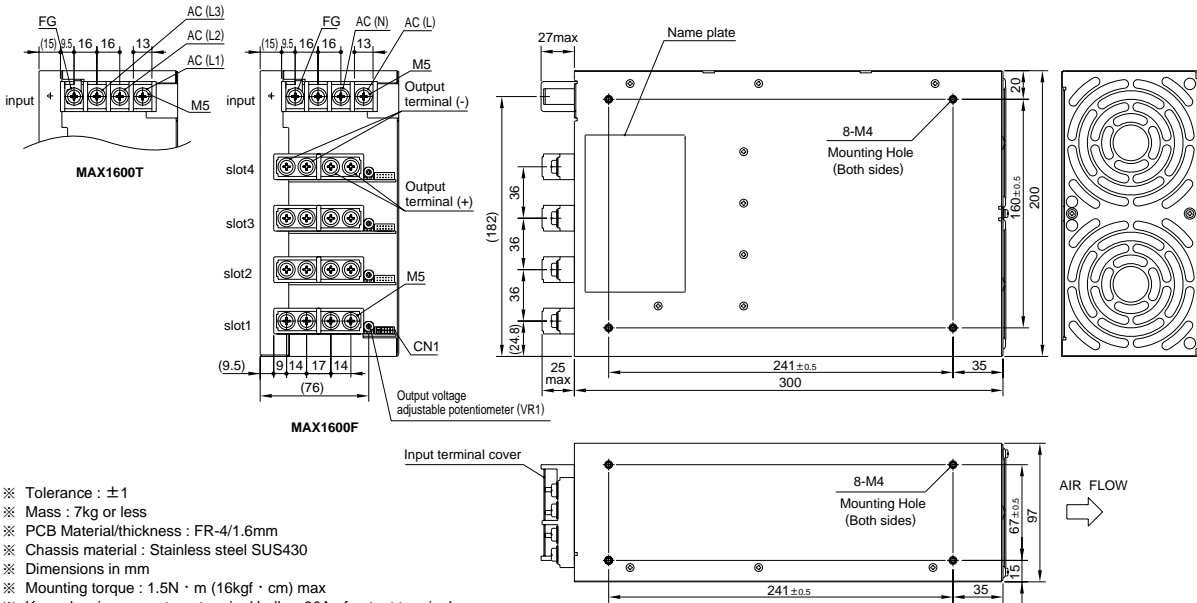

MAX

- ※ Tolerance : ± 1
- ※ Mass : 7kg or less
- ※ PCB Material/thickness : FR-4/1.6mm
- ※ Chassis material : Stainless steel SUS430
- ※ Dimensions in mm
- ※ Mounting torque : $1.5N \cdot m$ (16kgf · cm) max
- ※ Keep drawing current per terminal below 80A of output terminal.
- ※ The housing for the remote sensing unused is mounted on CN1 of each output module.
However, when the output module is connected in parallel, the housing is mounted on only master output module.
- ※ Output terminal covers are appended.

MAX3200T external view

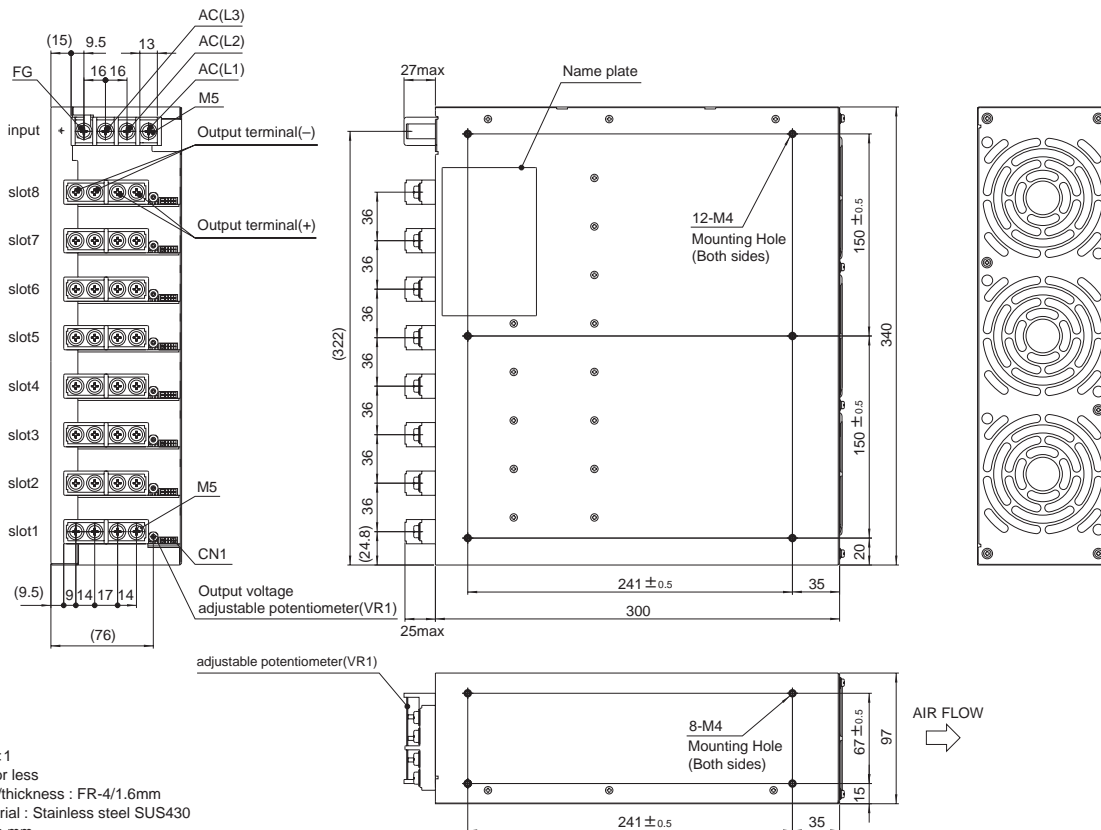

- ※ Tolerance : ± 1
- ※ Mass : 14kg or less
- ※ PCB Material/thickness : FR-4/1.6mm
- ※ Chassis material : Stainless steel SUS430
- ※ Dimensions in mm
- ※ Mounting torque : $1.5N \cdot m$ (16kgf · cm) max
- ※ Keep drawing current per terminal below 80A of output terminal.
- ※ The housing for the remote sensing unused is mounted on CN1 of each output module.
However, when the output module is connected in parallel, the housing is mounted on only master output module.
- ※ Output terminal covers are appended.