



# Chassis Mount Power Supplies

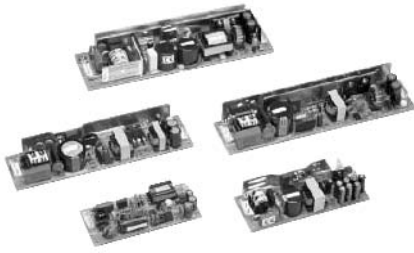

- Input Voltage (85-132V)
- Approved to UL/CSA, Excellent Thermal Management
- Operating Temp = -10°C to 50°C
- Highly Reliable Design
- High Efficiency Design
- Low Profile Designs
- Withstand Voltage of 2kV (input to output)
- FCC Class B Compliant

Part #	Output Ratings		Efficiency (%)	Leakage Current (mA)	Cooling Method	Remote ON/OFF	Package Dimensions mm(inches) Typ		
	VDC	Amps					L	W	H
EBS15-5	5	3.0	74	0.5	Convection	NO	115.0 (4.528)	50.0 (1.968)	16.0 (0.630)
EBS30-5	5	6.0	77	0.5	Convection	NO	132.5 (5.216)	50.0 (1.968)	24.0 (0.944)
EBS50-5	5	10.0	80	0.5	Convection	NO	195.0 (7.677)	50.0 (1.968)	24.0 (0.944)
EBS75-5	5	15.0	81	0.5	Convection	NO	222.0 (8.740)	50.0 (1.968)	31.0 (1.220)
EBS100-5	5	20.0	76	0.5	Convection	NO	222.0 (8.740)	62.0 (2.441)	33.0 (1.299)
EBS15-12	12	1.3	78	0.5	Convection	NO	115.0 (4.528)	50.0 (1.968)	16.0 (0.630)
EBS30-12	12	2.5	80	0.5	Convection	NO	132.5 (5.216)	50.0 (1.968)	24.0 (0.944)
EBS50-12	12	4.3	82	0.5	Convection	NO	195.0 (7.677)	50.0 (1.968)	24.0 (0.944)
EBS75-12	12	6.3	83	0.5	Convection	NO	222.0 (8.740)	50.0 (1.968)	31.0 (1.220)
EBS100-12	12	9.0	82	0.5	Convection	NO	222.0 (8.740)	62.0 (2.441)	33.0 (1.299)
EBS15-15	15	1.0	79	0.5	Convection	NO	115.0 (4.528)	50.0 (1.968)	16.0 (0.630)
EBS30-15	15	2.0	82	0.5	Convection	NO	132.5 (5.216)	50.0 (1.968)	24.0 (0.944)
EBS50-15	15	3.5	83	0.5	Convection	NO	195.0 (7.677)	50.0 (1.968)	24.0 (0.944)
EBS75-15	15	5.0	84	0.5	Convection	NO	222.0 (8.740)	50.0 (1.968)	31.0 (1.220)
EBS100-15	15	7.0	84	0.5	Convection	NO	222.0 (8.740)	62.0 (2.441)	33.0 (1.299)
EBS15-24	24	0.7	80	0.5	Convection	NO	115.0 (4.528)	50.0 (1.968)	16.0 (0.630)
EBS30-24	24	1.3	84	0.5	Convection	NO	132.5 (5.216)	50.0 (1.968)	24.0 (0.944)
EBS50-24	24	2.5	84	0.5	Convection	NO	195.0 (7.677)	50.0 (1.968)	24.0 (0.944)
EBS75-24	24	3.5	85	0.5	Convection	NO	222.0 (8.740)	50.0 (1.968)	31.0 (1.220)
EBS100-24	24	5.0	87	0.5	Convection	NO	222.0 (8.740)	62.0 (2.441)	33.0 (1.299)

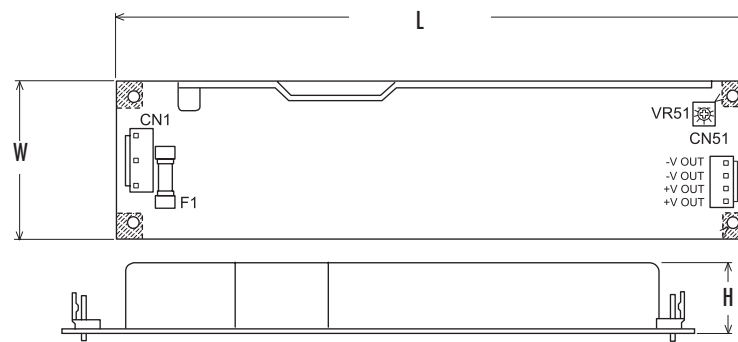

4 shaded point indicate mountable range of metal parts for fixing.

## TAMURA CORPORATION

43352 Business Park Drive. | P.O. Box 892230 Temecula, CA 92589-2230 | www.tamuracorp.com

USA

Tel: 800-872-6624  
Fax: 909-676-9482

Japan

Tel: 81 (0)3 3978-2111  
Fax: 81 (0)3 3923-0230

United Kingdom

Tel: 44 (0) 1380 731 700  
Fax: 44 (0) 1380 731 702

Hong Kong


Tel: 852-2389-4321  
Fax: 852-2341-9689

# Chassis Mount Power Supplies

- Universal Input (90-264V) SMPS
- Approved to UL/CSA, MITI and TUV
- Excellent Thermal Management
- Robust, Fault Tolerant Design
- Highly Reliable Design
- No overshoot during ON/OFF
- Meets IEEE587 C62.41 Test
- Withstand Voltage of 3kV (input to output)
- Withstand Voltage of 1.5kV (output to chassis ground)



Part #	Output Ratings		Efficiency Min (%)	Leakage Current (mA)	Minimum Load (A)	Cooling Method	Remote ON/OFF Control	Package Dimensions mm(inches) Typ		
	VDC	Amps						H	W	L
<a href="#">QVS-5E-UC</a>	5	10.0	70	0.75	0	Convection	NO	50.8 (2.00)	124.0 (4.88)	117.3 (4.62)
<a href="#">QVS-5F-UC</a>	5	20.0	70	0.75	0	Convection	YES	60.2 (2.37)	124.0 (4.88)	180.3 (7.10)
<a href="#">QVS-5G-UC</a>	5	30.0	70	0.75	0	Convection	YES	60.2 (2.37)	124.0 (4.88)	218.4 (8.60)
<a href="#">QVS-5H-UC</a>	5	45.0	70	0.75	0	Convection	YES	66.0 (2.60)	124.0 (4.88)	269.2 (10.60)
<a href="#">QVS-5J-UC</a>	5	60.0	70	0.75	0	Convection	YES	69.9 (2.75)	124.0 (4.88)	304.8 (12.00)
<a href="#">QVS-12E-UC</a>	12	5.0	70	0.75	0	Convection	NO	50.8 (2.00)	124.0 (4.88)	117.3 (4.62)
<a href="#">QVS-12F-UC</a>	12	10.0	70	0.75	0	Convection	YES	60.2 (2.37)	124.0 (4.88)	180.3 (7.10)
<a href="#">QVS-12G-UC</a>	12	15.0	70	0.75	0	Convection	YES	60.2 (2.37)	124.0 (4.88)	218.4 (8.60)
<a href="#">QVS-12H-UC</a>	12	22.0	70	0.75	0	Convection	YES	66.0 (2.60)	124.0 (4.88)	269.2 (10.60)
<a href="#">QVS-12J-UC</a>	12	30.0	70	0.75	0	Convection	YES	69.9 (2.75)	124.0 (4.88)	304.8 (12.00)
<a href="#">QVS-24E-UC</a>	24	2.5	70	0.75	0	Convection	NO	50.8 (2.00)	124.0 (4.88)	117.3 (4.62)
<a href="#">QVS-24F-UC</a>	24	5.0	70	0.75	0	Convection	YES	60.2 (2.37)	124.0 (4.88)	180.3 (7.10)
<a href="#">QVS-24G-UC</a>	24	8.0	70	0.75	0	Convection	YES	60.2 (2.37)	124.0 (4.88)	218.4 (8.60)
<a href="#">QVS-24H-UC</a>	24	12.0	70	0.75	0	Convection	YES	66.0 (2.60)	124.0 (4.88)	269.2 (10.60)
<a href="#">QVS-24J-UC</a>	24	16.0	70	0.75	0	Convection	YES	69.9 (2.75)	124.0 (4.88)	304.8 (12.00)

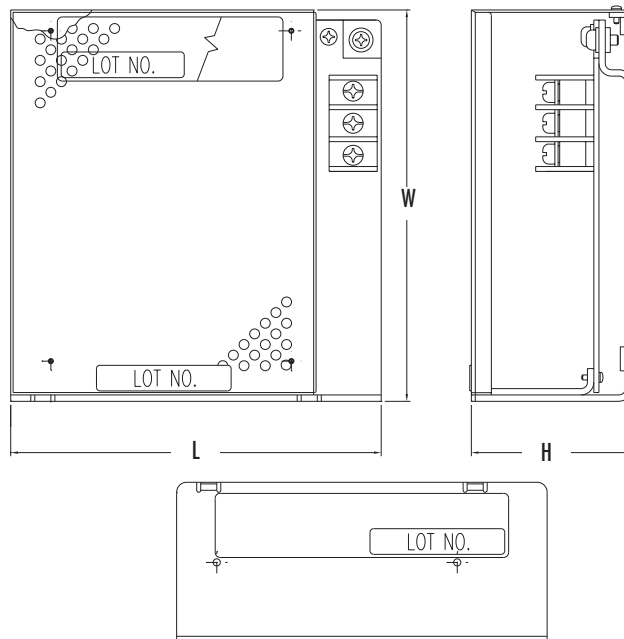

## TAMURA CORPORATION

43352 Business Park Drive. | P.O. Box 892230 Temecula, CA 92589-2230 | www.tamuracorp.com

USA	Japan	United Kingdom	Hong Kong
Tel: 800-872-6624	Tel: 81 (0)3 3978-2111	Tel: 44 (0) 1380 731 700	Tel: 852-2389-4321
Fax: 909-676-9482	Fax: 81 (0)3 3923-0230	Fax: 44 (0) 1380 731 702	Fax: 852-2341-9689